


## MONITOR MR1

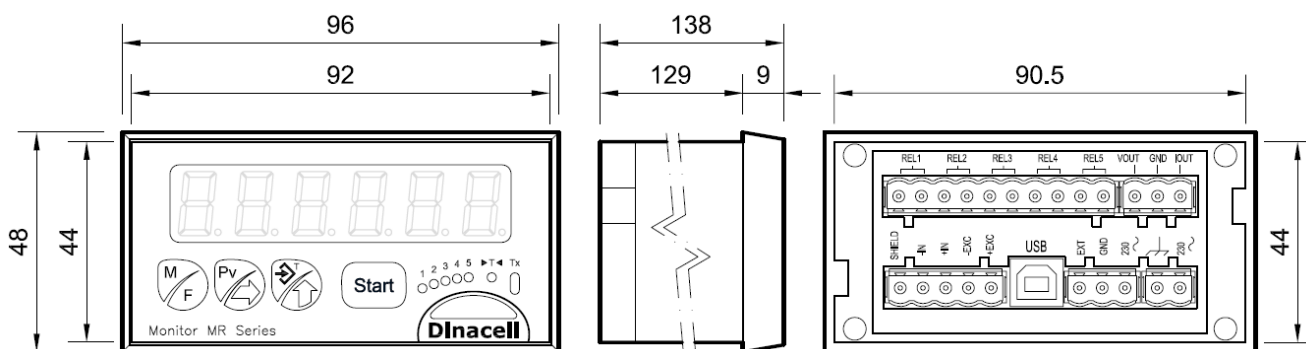

Dimensions in mm

Features	Technical Specifications	
<ul style="list-style-type: none"> <li>• Low Energy Consumption</li> <li>• Easy programmable</li> <li>• 5 Different Operating Modes                             <ul style="list-style-type: none"> <li>○ Scale.</li> <li>○ Pick value reading.</li> <li>○ Pulse counter.</li> <li>○ Tank unload.</li> <li>○ Dosing.</li> </ul> </li> <li>• 6 Digits Display</li> <li>• Possibility of adjustment without weight</li> <li>• ADC with 16,000,000 points</li> <li>• USB Communication</li> <li>• 5 alarms with Relays.</li> <li>• Analogical Out</li> <li>• External input for cycle starting</li> </ul>	<b>Power supply</b>	230 V
	<b>Maximum power consumption</b>	5 W
	<b>Relay contact voltage</b>	250 Vac
	<b>Relay contact current</b>	10 A
	<b>Load cell input Accuracy</b>	0.01 % F.S.
	<b>Analogical out</b>	0-20 Ma 4-20 mA 0-10 V
	<b>Max. Nº Load Cells to connect</b>	12 Load Cells of 350 Ω