



IDS-D

Overload indicator




More information

IDS-D Audible and visual indicator

The IDS is activated when it receives a voltage between 5 and 30 V DC, sent by the load-weighing device when an overload alarm occurs.

Once activated, the IDS emits an audible signal and a flashing red light, providing both visual and acoustic indication of the overload condition in the elevator car.

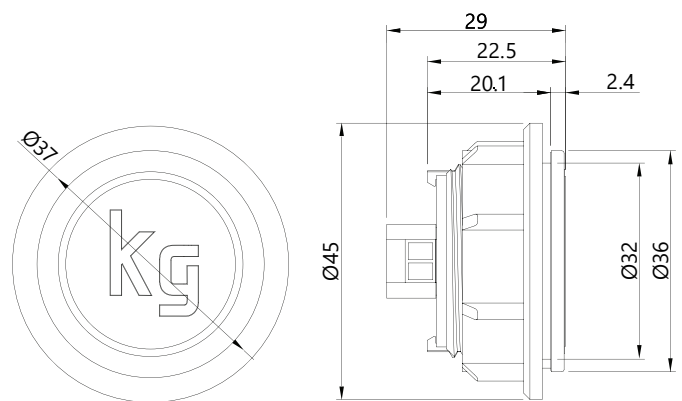

Parameter		Units	Specifications	
Temperature range	Locking ring	-	✓	
	Faceplate thickness	mm	1,5 - 8	
	Installation depth	mm	25	
Conectivity	Screw terminal	mm ²	2 Poles	0,1 - 1
	IDC terminal	AWG	2 Poles	28 - 26
Buzzer		dB (A)	65	
Temperature range		°C	0 ± 65	
Standar compliance		-	EN 81 - 20	
Housin rim		-	St. steel, mirrored	
Plate		-	Polycarbonate, crystal clear	
LED color		-	White	
Voltage Range		VDC	5 - 30	
Maximum current		mA	35	
Product Ref.		-	030844	

For more information

www.dinacell.com

Dinacell Electrónica S.L.
 Pol. Ind. Santa Ana, C/ de la Fundación 8
 CP 28522 Rivas Vaciamadrid, Madrid, ESPAÑA
 Tel. (+34) 913 001 435

Certified company



Management System
 ISO 9001:2015
 ISO 14001:2015



www.tuv.com
 ID: 9105038889



PYME INNOVADORA



Document Ref: D2308-05

Publication Date:

04/05/2026

VMFT06.04

Dinacell Electrónica S.L. reserves the right to add, modify and/or delete content of the document without prior notice. The content indicated here should be used as general product information. It should not be interpreted as a guarantee of quality or durability.