


MONITOR MR1

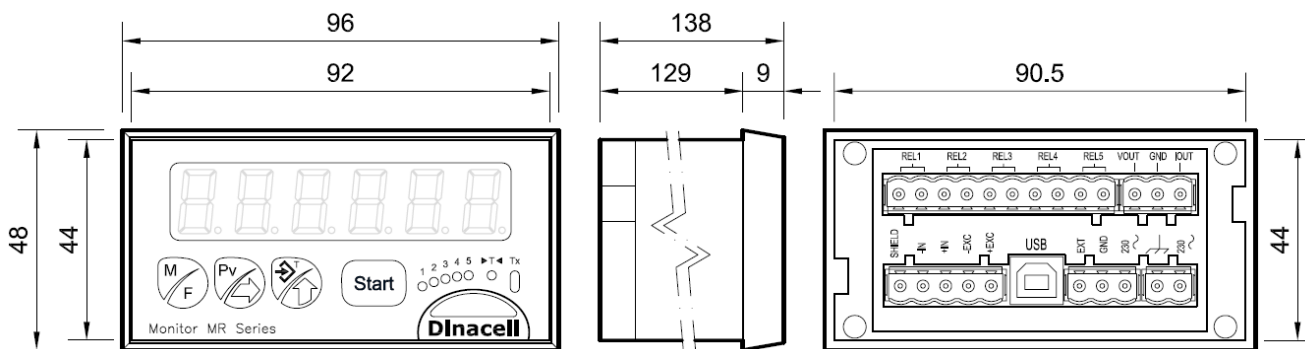

Dimensions in mm

Features	Technical Specifications	
<ul style="list-style-type: none"> • Low Energy Consumption • Easy programmable • 5 Different Operating Modes <ul style="list-style-type: none"> ○ Scale. ○ Pick value reading. ○ Pulse counter. ○ Tank unload. ○ Dosing. • 6 Digits Display • Possibility of adjustment without weight • ADC with 16,000,000 points • USB Communication • 5 alarms with Relays. • Analogical Out • External input for cycle starting 	Power supply	230 V
	Maximum power consumption	5 W
	Relay contact voltage	250 Vac
	Relay contact current	10 A
	Load cell input Accuracy	0.01 % F.S.
	Analogical out	0-20 Ma 4-20 mA 0-10 V
	Max. Nº Load Cells to connect	12 Load Cells of 350 Ω